



10215 TEAK JACK OUTDOOR HIGH BAR TABLE ASSEMBLY INSTRUCTIONS FOR BAR TABLE INSTALLATION




HARDWARE ENCLOSED

 HALF MOON WASHER (4pcs)	 HALF MOON BOLT M8x100 (4pcs)	 SCREW M8x60 (12pcs)	 THREADED BOLT M8x100 (2pcs)
 WASHER M8 (12pcs)	 SPRING WASHER M8 (12pcs)	 DOWEL Ø12x30 mm (8pcs)	
 CURVED WASHER (2pcs)	 LONG NUT M8 (2pcs)		

TOOL ENCLOSED



TOOL REQUIRED (Not included in package)




IN YOUR PACKAGE :

ASSEMBLY INSTRUCTIONS
HARDWARE (AS LISTED ABOVE)

PARTS TO BE ASSEMBLED

1. TABLE TOP (1 pc)
2. LEGS (2 pcs)
3. STRETCHER (1 pc)

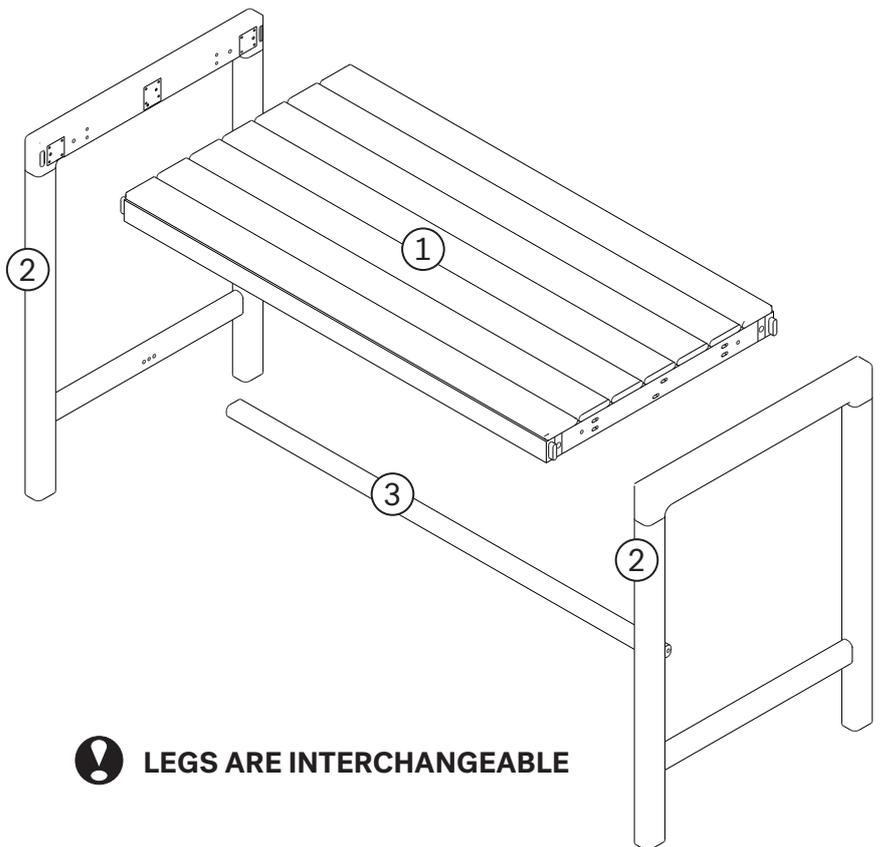


 LEGS ARE INTERCHANGEABLE

SYMBOLS



DIRECTION



NUMBER OF
PERSONS NEEDED



USE HAND




USE HALF MOON KEY
TO TIGHTEN



USE WRENCH
TO TIGHTEN



NOTICE

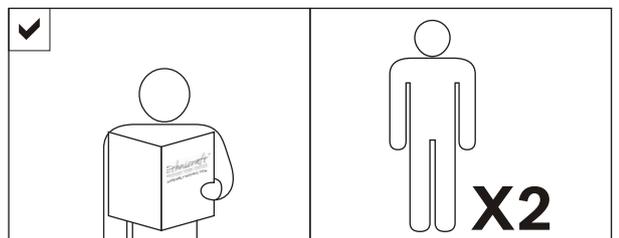


10215 TEAK JACK OUTDOOR HIGH BAR TABLE ASSEMBLY INSTRUCTIONS FOR BAR TABLE INSTALLATION



A CONNECTING BOLTS TO LEGS

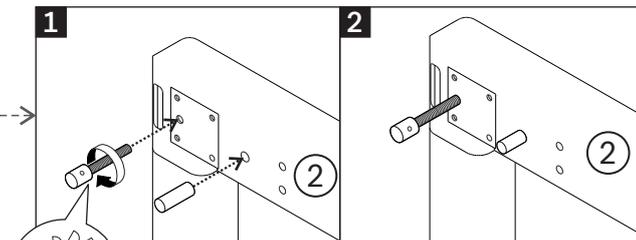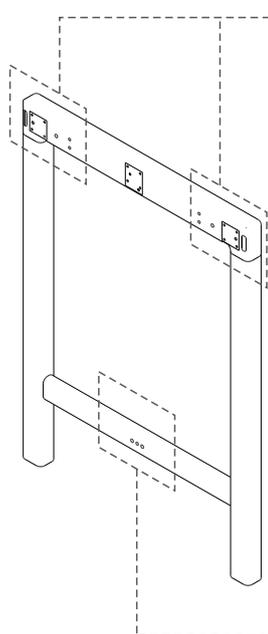




- USE HALF MOON BOLT M8x100 (2X)
- USE DOWEL Ø12x30 mm (2X)
- DO NOT TIGHTEN FULLY

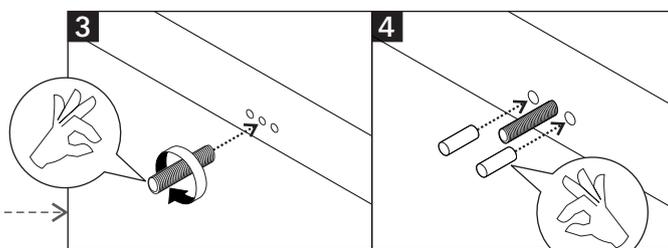

- USE THREADED BOLT M8x100 (1X)
- USE DOWEL Ø12x30 mm (2X)

! REPEAT THESE STEPS FOR THE OTHER LEG

B JOINING FIRST LEG TO TABLE TOP

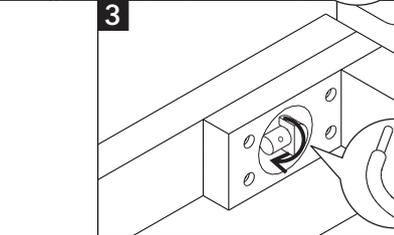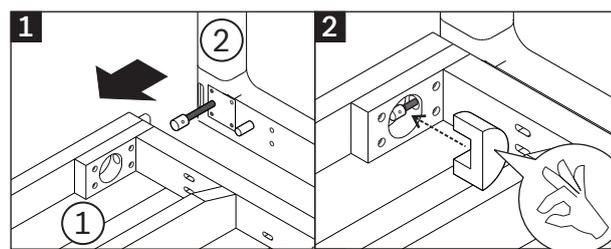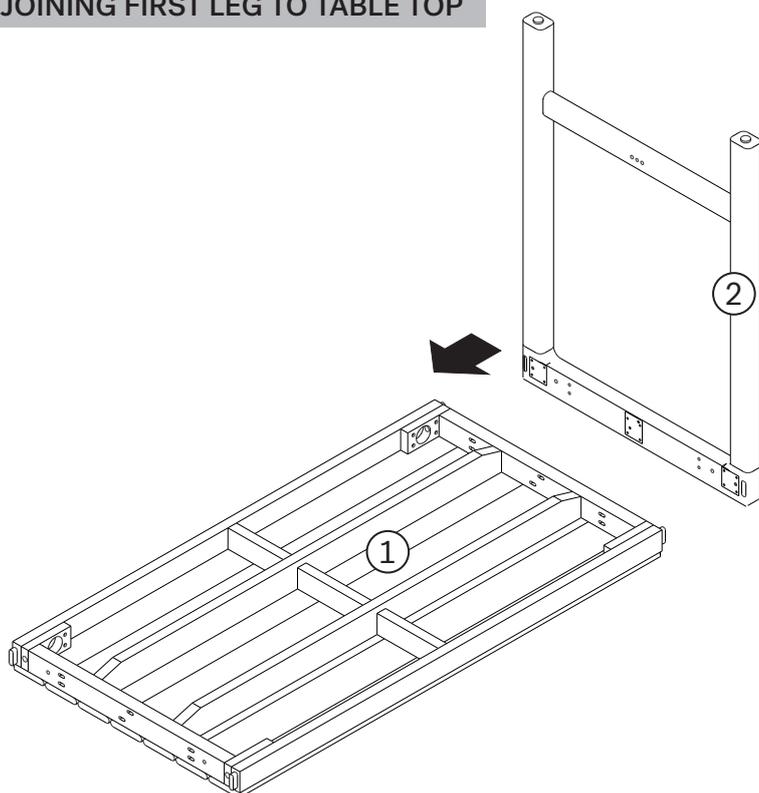



- USE HALF MOON WASHER (2X)
- DO NOT TIGHTEN FULLY

! REMOVE CONTENTS TO LAY OUT ON THE FLATTENED CARTON, CARPETED AREA OR ANOTHER PROTECTIVE SURFACE TO AVOID DAMAGE WHILE ASSEMBLING.

10215 TEAK JACK OUTDOOR HIGH BAR TABLE ASSEMBLY INSTRUCTIONS FOR BAR TABLE INSTALLATION






C FIXING SCREWS IN PLACE

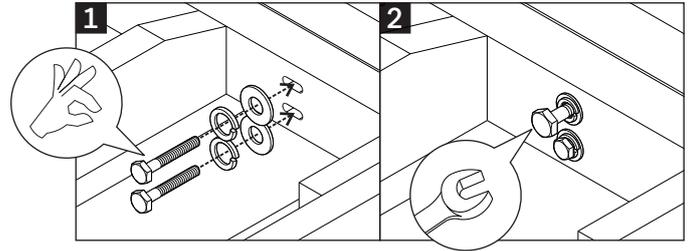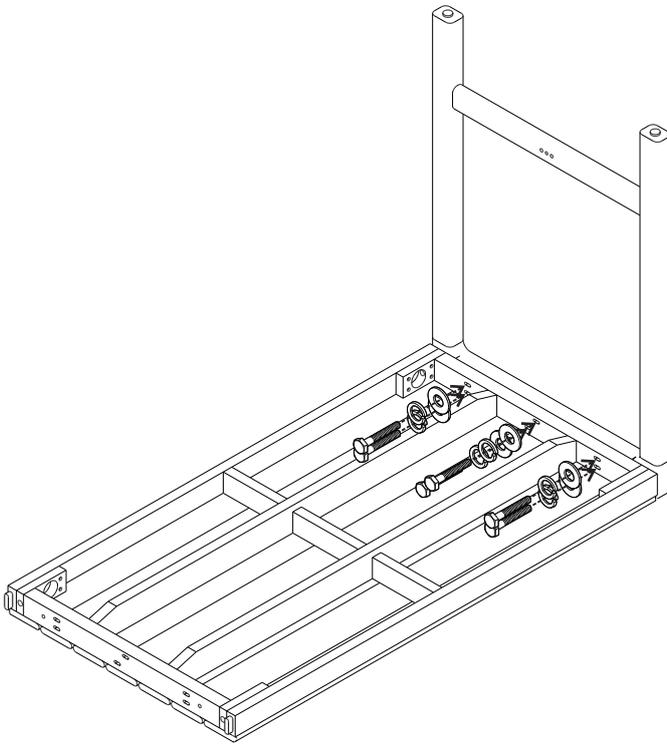

- USE SCREW M8x60 (6X)
- USE WASHER M8 (6X)
- USE SPRING WASHER M8 (6X)
- DO NOT TIGHTEN FULLY

D FITTING STRETCHER

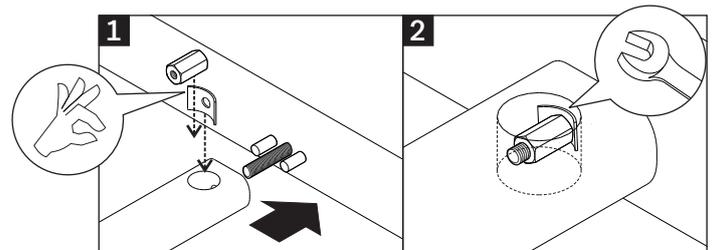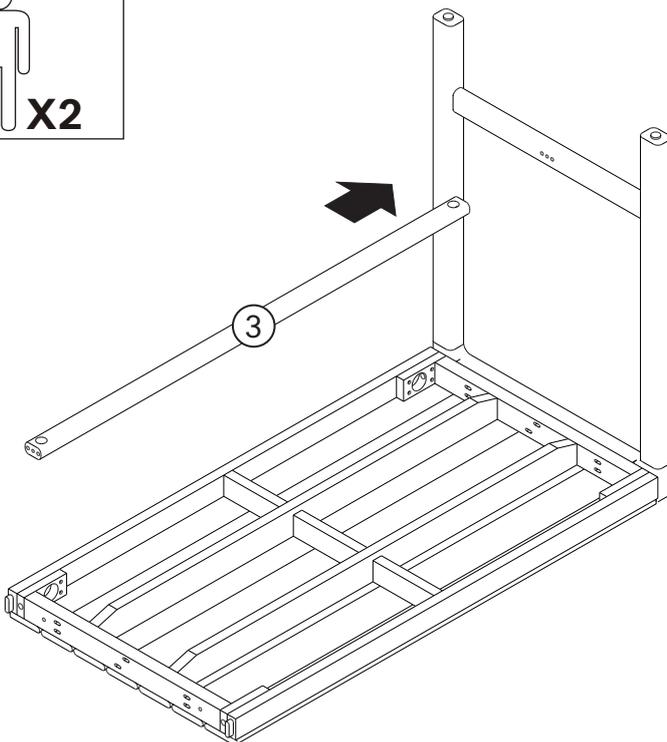



- USE CURVED WASHER (1X)
- USE LONG NUT M8 (1X)
- DO NOT TIGHTEN FULLY

ONE PERSON REQUIRED TO HOLD THE STRETCHER IN PLACE


10215 TEAK JACK OUTDOOR HIGH BAR TABLE ASSEMBLY INSTRUCTIONS FOR BAR TABLE INSTALLATION



E JOINING SECOND LEG TO STRETCHER AND TABLE TOP

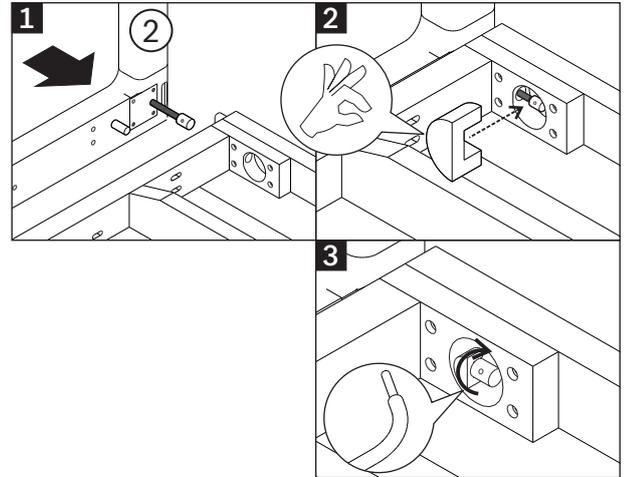
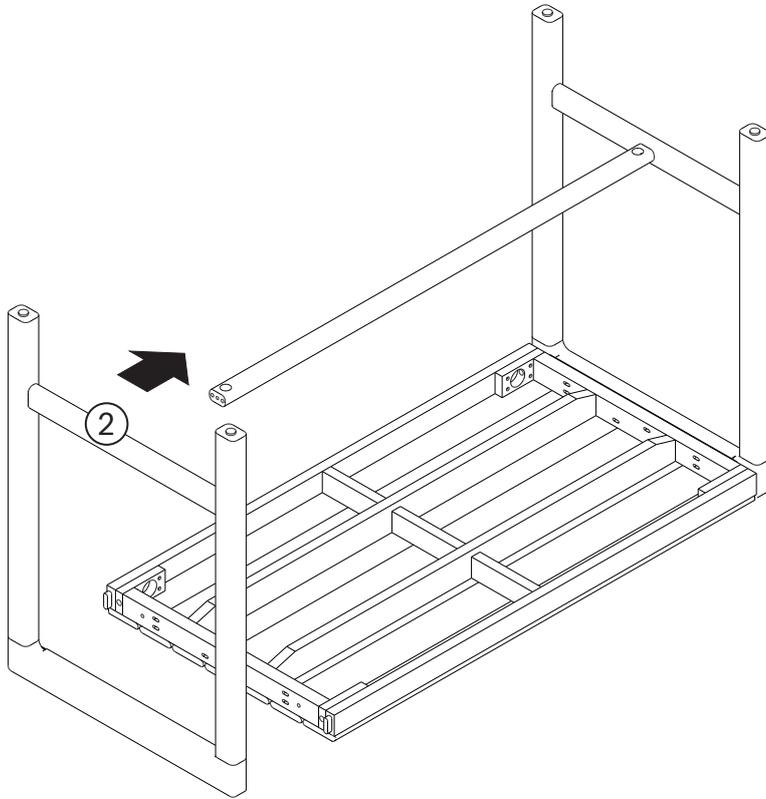


- ! - USE HALF MOON WASHER (2X)
- DO NOT TIGHTEN FULLY

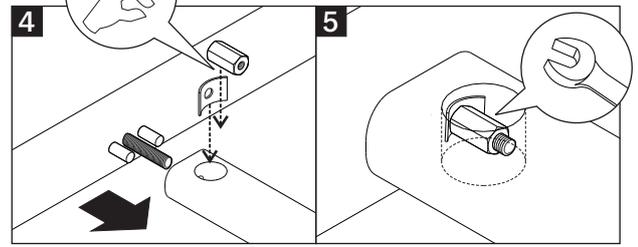

- ! - USE CURVED WASHER (1X)
- USE LONG NUT M8 (1X)
- DO NOT TIGHTEN FULLY

F FIXING SCREWS IN PLACE

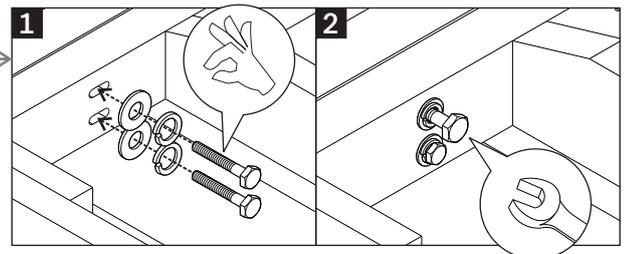
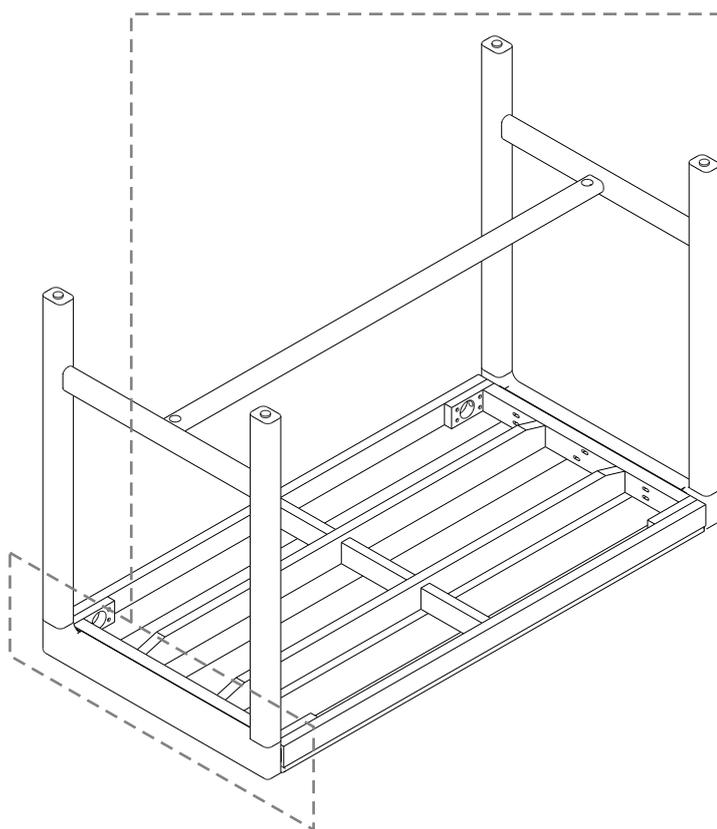


- ! - USE SCREW M8x60 (6X)
- USE WASHER M8 (6X)
- USE SPRING WASHER M8 (6X)
- DO NOT TIGHTEN FULLY

10215 TEAK JACK OUTDOOR HIGH BAR TABLE ASSEMBLY INSTRUCTIONS FOR BAR TABLE INSTALLATION








G ADJUST ALL SCREWS

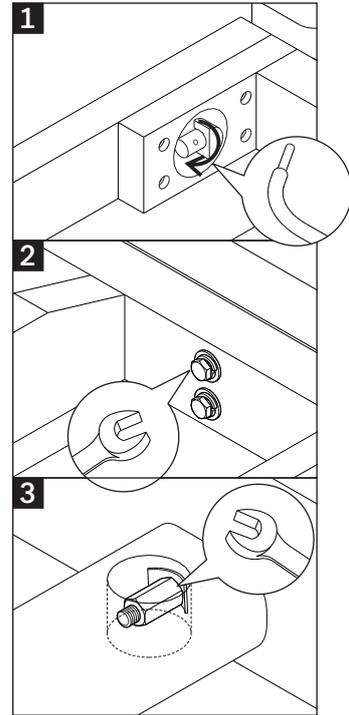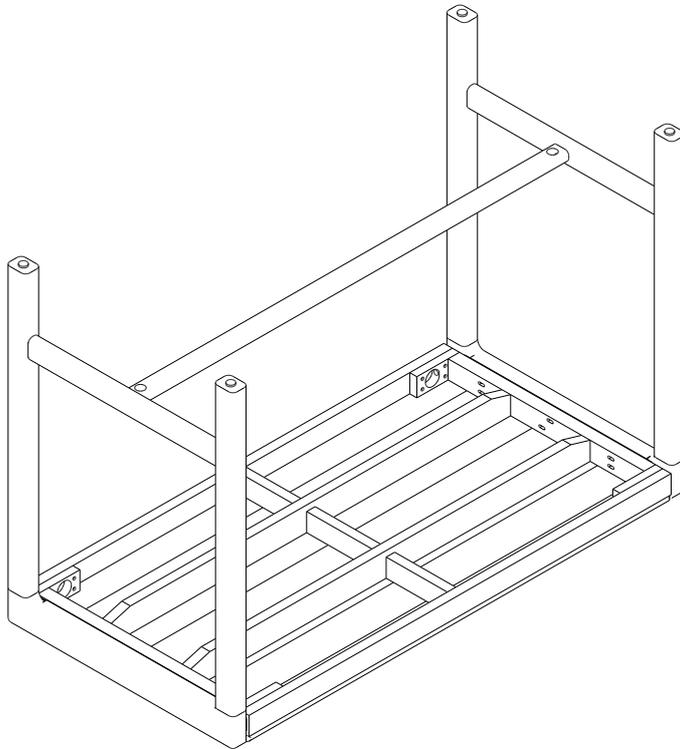

! TIGHTEN FULLY ALL SCREWS

H MODIFY THE ADJUSTABLE GLIDES

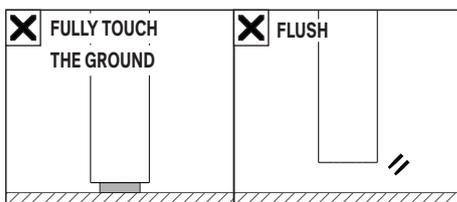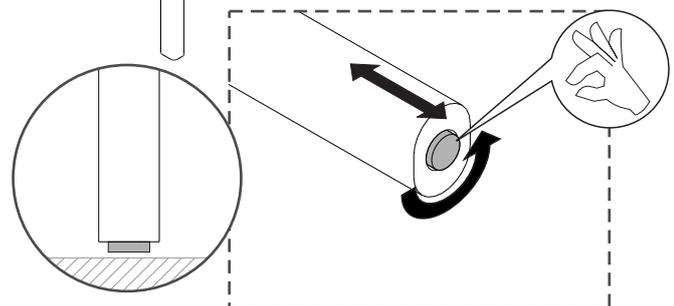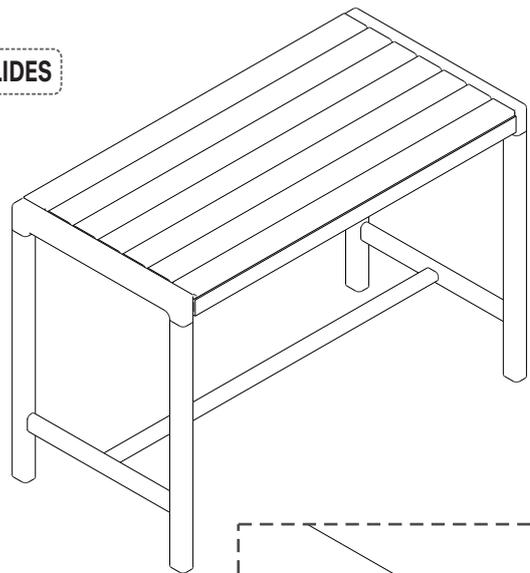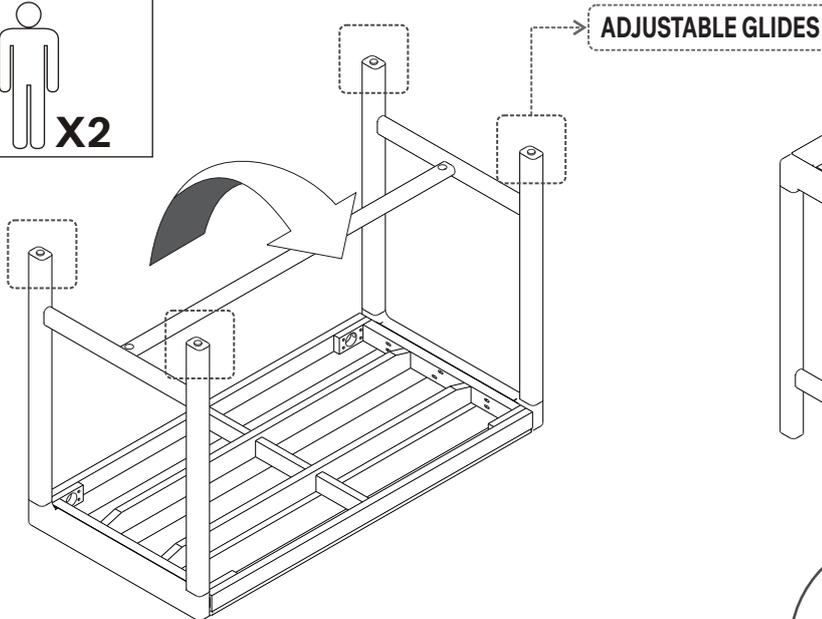

NOTE :
TO ENSURE STABILITY, ALL GLIDES SHOULD BE ADJUSTED TO MAKE EVEN CONTACT WITH THE SURFACE UNDERFOOT.